




MVE 500/3N*-DC-40A0-24V [ENZ0050040A02A0000]

DC - 2 poles - 3000 RPM - 24 V - DC

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power factor	Ia/In
10,4	5,2	530	24	0,26	11		5

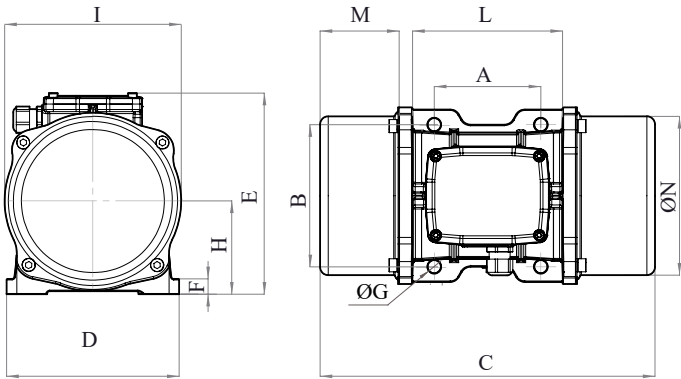

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on “FINDER” app.
Contact us for more information.

OVERALL DIMENSIONS [mm]													
Weight [Kg]	A	B	G	Holes number	C	D	E	F	H	I	L	M	N
14,4	105	140	13	4	330	170	195	15	92	174	166	78	160

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
/	Yes	M12	13 x 24 mm	80	2G1.5 90°	M16 80°C

BEARINGS LIFE HOURS				
Bearing model	Type	100% C.F	80% C.F	50% C.F
6306 2RS		1844	3602	14753

CERTIFICATION	
Atex II 3D Ex tc IIIc T140°C IP69K	

REV.2-12/11/2024

Dimension with coarse degree of accuracy related to UNI 22768/1 Rights reserved to modify technical specifications.

